


INTRODUCING THE NEW PARQCOLOR COLLECTION

Abet Laminati enlarges its catalogue with a new product line of HPL Flooring developed for the Interior. Parqcolor is an amazing collection made up of 42 decors and 5 finished, for an incomparable tactile and visual experience.

PAR QCO LOR



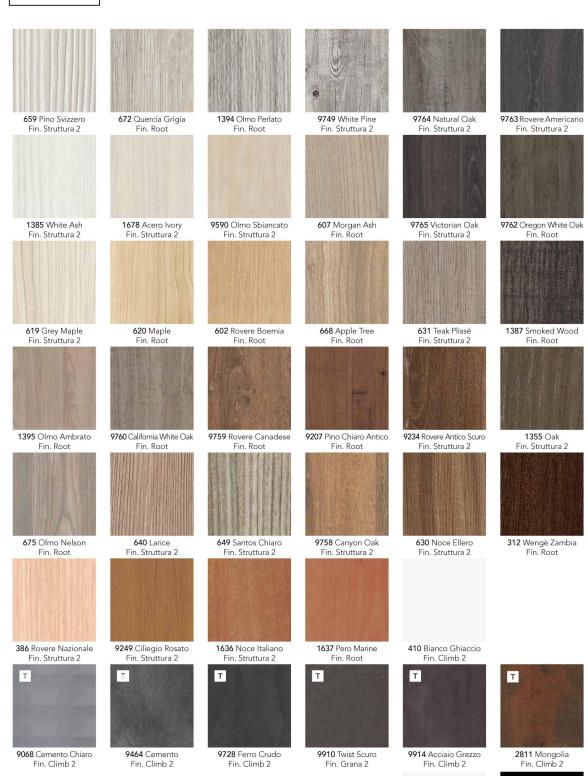

Т

421 Nero Fin. Lucido





Parqcolor is a floating floor that is cutting-edge in terms of both technology and aesthetics. The characteristic that makes Parqcolor an outstanding product on the laminate market is the High Pressure process - High Pressure Laminate.

The surface of the laminated flooring is made up by laying cellulose sheets impregnated with phenol resins and a decorative sheet impregnated with melamine resins. Next the panel is subjected to very high temperatures and pressures by means of flat presses (not rollers). This procedure results in polycondensation of the resins that makes the Print HPL laminate a product with exceptional: hardness, non porosity, anti-staticity, scratch resistance, wear resistance, impact resistance, resistance to acts of vandalism and fire resistance.

Made in Italy.

CE Marking: obtained by an external body authorised by the Italian Interior Ministry.

Guarantee:

25 years for residential installations, 6 years for commercial installations.

Customization: possible with the use of the digital printing technology.

Antistatic.

Aseptic and hygienic.

Fire Resistance: Euroclass Bfl-S1 fire reaction. Resistant to cigarette burns.

Lightfastness.

Stain-resistant. Inalterability: total resistance to the transfer of pigments and plasticisers

Slip Resistance: complies with the European EN 13893:2002 standard, dynamic friction coefficient, Class DS.

No maintenance or waxing needed.

Installation: floating flooring that can also be laid on fitted carpet bases and on floor slabs with radiant panel heating.

Limited number of joints possible also for big areas thanks to the stability of the planks.

HDF - High Density Fibreboard: constitutes the support for the Parqcolor Collection, a panel made up of wood fibres bonded using a special resin with good mechanical properties, excellent dimensional stability, and compactness along the edges (density above 850 kg/m3).



Eco-Compatible and Recyclable: all the raw materials used in manufacturing Parqcolor flooring are sourced from Sustainably Managed Forests - FSC Standard (Forest Stewardship Council).

Formaldehyde Emission: values 10 times lower than the current norms.

COV emission: class A+



IMAGINE, CLICK, CREATE!

Parqcolor plays with creativity through the use of digital printing technique. Digital printing, in fact, allows any commercial or evocative image to be created, for any format. Every project consists of a unique characteristic.

